
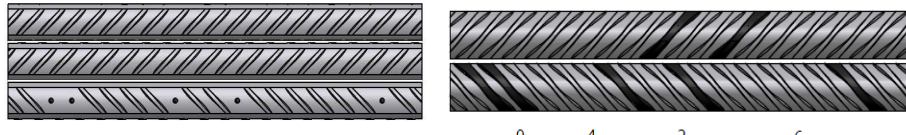


## Scheda tecnica Rete elettrosaldata Francia

### Technical specification: Standard Welded Meshes France

Proprietà meccaniche – Mechanical properties								
Nazione <i>Nation</i>	Norma <i>Standard</i>	Marca <i>Grade</i>	Re N/mm <sup>2</sup>	Rm N/mm <sup>2</sup>	Re/Re nom	A 10 %	A 5 %	Agt %
FANCIA / FRANCE	NFA 35-080/2	B500B	≥ 500		≥ 1.08			≥ 5.0
FANCIA / FRANCE	NFA 35-080/2	B500A	≥ 500		≥ 1.05			≥ 2.5
FANCIA / FRANCE	NFA 35-024*	B600A	≥ 600					

Qualifiche <i>Certifications</i>		Geometria nervature e marchio di laminazione <i>Ribs geometry and rolling mark</i>	
Nazione <i>Country</i>	FRANCIA / FRANCE	<b>B 600 A / B 500 A Ø 4.5 ÷ 9</b>	<b>B 500 B Ø 6 ÷ 10</b>
Ente Qualificazione <i>Certification body</i>			

RETE ELETTRISALDATA SECONDO NF A 35-024* / NF A 35-080-2													
Tipologia		Sezione		Maglia mm	Diametro mm	Sporgenza fili mm/mm	Numero di fili	Dimensioni m	Massa nominale kg/m <sup>2</sup>	Superficie 1 pannello m <sup>2</sup>	Peso 1 pannello kg	Pannelli per pacco	Peso pacco kg
		cm <sup>2</sup> /m	cm <sup>2</sup> /m										
PAF C*	long.	0,80	0,80	200	4,5	100/100	12	3,60	1,250	8,64	10,80	100	1080
	trasv.		0,80	200	4,5	100/100	18	2,40					
PAF 10	long.	1,19	1,19	200	5,5	100/100	12	4,20	1,870	10,80	18,85	70	1319
	trasv.		1,19	200	5,5	100/100	21	2,40					
ST 20	long.	1,89	1,89	150	6	150/150	16	6,00	2,487	14,40	35,81	40	1432
	trasv.		1,28	300	7	75/75	20	2,40					
ST 25	long.	2,57	2,57	150	7	150/150	16	6,00	3,020	14,40	43,49	40	1740
	trasv.		1,28	300	7	75/75	20	2,40					
ST 35	long.	3,85	3,85	100	7	150/150	24	6,00	4,026	14,40	57,98	30	1739
	trasv.		1,28	300	7	50/50	20	2,40					
ST 50	long.	5,03	5,03	100	8	150/150	24	6,00	5,267	14,40	75,84	20	1517
	trasv.		1,68	300	8	50/50	20	2,40					
ST 60	long.	6,36	6,36	100	9	125/125	24	6,00	6,986	14,40	100,60	16	1610
	trasv.		2,54	250	9	50/50	24	2,40					
ST 15 C	long.	1,42	1,42	200	6	100/100	12	4,00	2,220	9,60	21,31	70	1492
	trasv.		1,42	200	6	100/100	20	2,40					
ST 25 C	long.	2,57	2,57	150	7	75/75	16	6,00	4,026	14,40	57,98	30	1739
	trasv.		2,57	150	7	75/75	40	2,40					
ST 25 CS	long.	2,57	2,57	150	7	75/75	16	3,00	4,026	7,20	28,99	40	1160
	trasv.		2,57	150	7	75/75	20	2,40					
ST 40 C	long.	3,85	3,85	100	7	50/50	24	6,00	6,04	14,40	86,98	20	1740
	trasv.		3,85	100	7	50/50	60	2,40					
ST 50 C	long.	5,03	5,03	100	8	50/50	24	6,00	7,900	14,40	113,76	15	1706
	trasv.		5,03	100	8	50/50	60	2,40					
ST 65 C	long.	6,36	6,36	100	9	50/50	24	6,00	9,980	14,40	143,71	10	1437
	trasv.		6,36	100	9	50/50	60	2,40					